

2 NEW PRODUCTS!

TWO (2) NEW CHOICES FOR EXTREME FLUX RECOVERY WITH FULLY AUTOMATIC OPERATION!

TO SEE ALL OUR PRODUCTS, VISIT US AT OUR WEB SITE : WELDENGINEERING.COM

**INTRODUCING THE:
MIGHTY-MAC-3000X (3 HP)
AND THE
MIGHTY-MAC-5000X (5 HP)**

The new **Mighty-Mac-3000X** and **Mighty-Mac-5000X** heavy duty flux recovery vacuum and dust collector offers **great new features**: ● **EXtremely** rugged and durable. ● **EXtremely** easy to maintain because large door to filters open with the flick of latches, and all internal covers are easily removed. ● **EXtremely** safe; micron filters remove particles below one (1) micron, making the air you breath much cleaner. ● The **Mighty-MacX** System also provides **auto sensing** dust cleaning logic. The filters are always **automatically** pulse cleaned as they become dirty (with no operator input)!

MIGHTY-MAC SPECIFICATIONS:

- **Weight:**
MM-3000X (3 HP): 330 lbs (149.7 Kg)
MM-5000X (5 HP): 350 lbs (158.8 Kg)
- **Dimensions** (Both MM-3000X and MM-5000X): 34" (86.4 cm) H x 31" (78.7 cm) W x 25" (63.5 cm) D
- **Electrical input:** Available for 200-230, 460, 575 Vac; 3PH; 60 Hz or 220, 380-415 Vac; 3PH; 50 Hz
- **Compressed air** (for filter cleaning only): < 1 cfm @ 70-100 psi (use min. 1/4" I.D. hose).
- **NOTE:** Hose, valves, flux separators and other flux storage and feed accessories must be ordered separately. **Please request "TB-MM-294", Systems Manual** for complete system configuration information. **(Please contact factory for ordering assistance.)**

Mighty-Mac 3000X or 5000X




HFH-100
2" Vacuum hose to Mighty-Mac vacuum



Optional HFH-100 heated hopper (250 °F, 121°C) automatically gravity feeds recovered flux to lower welding system hopper. System available with magnetic separator, unheated and in different flux capacities (i.e. 200 lbs, 300 lbs, 600 lbs, 1000 lbs etc.). Must be used with Mighty-Mac vacuum.

"Mighty-Mac 3000X/P or 5000X/P" Heavy duty vacuum unit only. Same as above, except that instead of a dust drawer, dust filter chamber has a hopper bottom. This enables continuous dumping of dust to a much larger dust container (i.e. optional FD-55 dust drum).

For ordering information please contact:

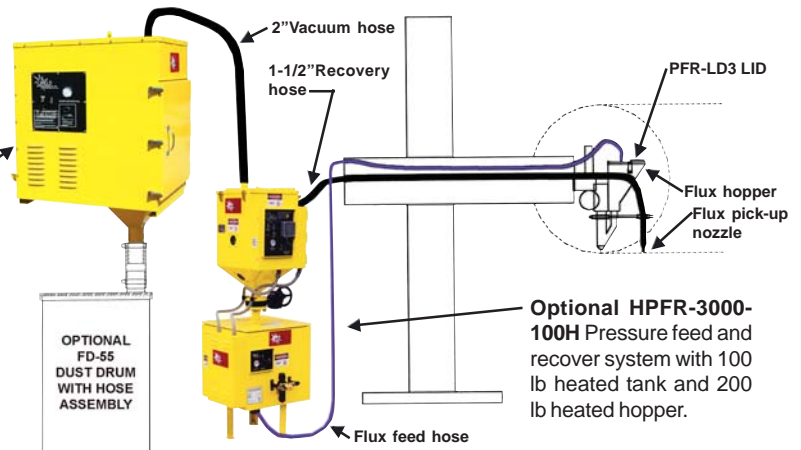

Optional HPFR-3000-100H Pressure feed and recover system with 100 lb heated tank and 200 lb heated hopper.

WELD
ENGINEERING CO., INC.

34 Fruit St.
Shrewsbury, MA 01545 (U.S.A.)
Telephone: (508) 842-2224
Fax: (508) 842- 3893
Web site: weldengineering.com
email: sales@weldengineering.com

FOR OTHER OPTIONAL ACCESSORIES:

- **Please request "TB-MM-294" Systems Manual** for complete system configurations. **(Please contact the factory for ordering and engineering assistance.)**