




THE "ULTRA COMPACT"

XP-3TRAC**AIR POWERED
FLUX RECOVERY SYSTEM**

**LIGHTWEIGHT, VERY COMPACT, RUGGED AND POWERFUL;
THE XP-3TRAC MOUNTS EASILY ONTO MOST AUTOMATIC
SUBMERGED ARC WELDING TRACTORS. ALSO IDEAL FOR
OTHER APPLICATIONS WHERE SIZE AND
WEIGHT ARE IMPORTANT FACTORS.**

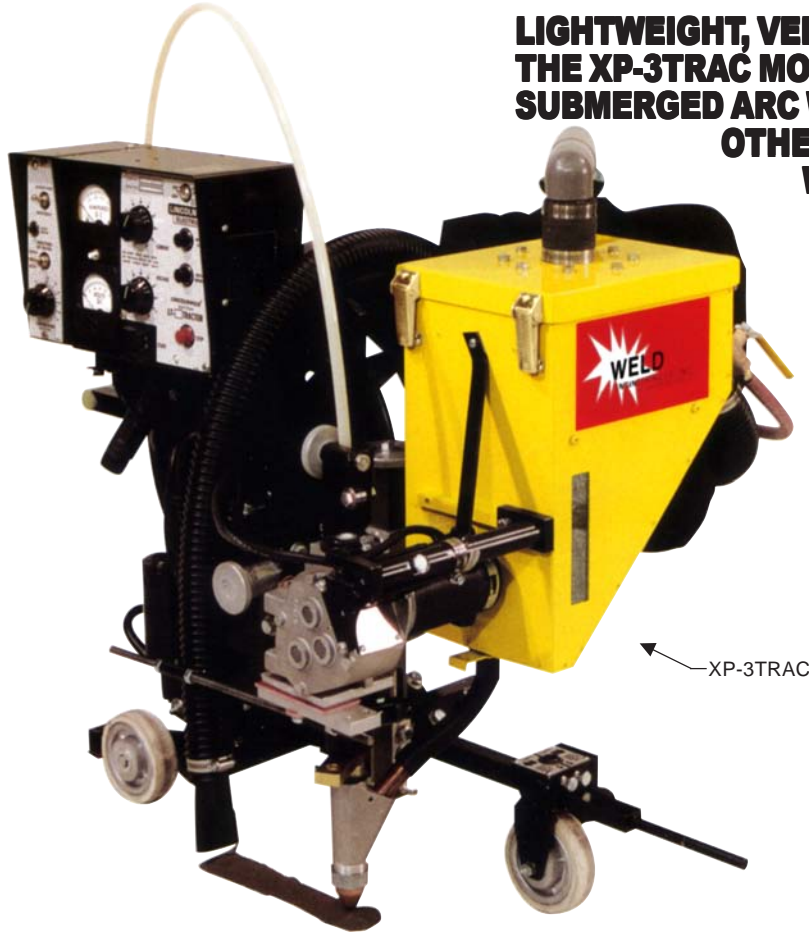

XP-3TRAC mounted on Lincoln LT-7 tractor in butt weld position. This system represents standard XP-3TRAC packaging which includes NZ-1 nozzle, FHM-1 hose bracket, 5 ft. (1.5m) 1-1/2" (3.81 cm) hose, dust bag, mounting bracket for XP-3TRAC to LT-7 and XP-3TRAC recovery machine. (Note: consult factory for mounting packages for other welding tractors).

IMPORTANT FEATURES:


- Ultra lightweight and compact.
- Continuously feeds recovered flux to welding nozzle **without** need of any transfer valve.
- Slag, dust, and fines are automatically removed from recovered flux.
- No moving parts in air pump. Very efficient air pump produces higher vacuum; uses less air and is much quieter than most competitive models.

OPTIONAL ACCESSORIES:

- RFHM-7 rear hose mounting bracket for LT-7 tractor. Use for fillet welding, or web to flange welds or when welding between tractor wheels.
- NZ-1 CRN corner weld pick-up nozzle.
- NZ-1 BUTT butt weld nozzle. (This nozzle drags on plate. Use with FHM-1ADJ hose bracket.)
- FHM - ADJ hose bracket. Allows NZ - 1 Butt nozzle to follow up / down contours of plate.

SPECIFICATIONS:

- **Weight Empty:** 15lbs (6.8Kg); total added wt. = 12 lbs. (5.4 kg) i.e., because Lincoln hopper is removed.
- **Capacity:** Same as standard LT-7 hopper; approx. 18lbs (8.2 Kg)
- **Dimensions:** 20-1/32"(50.9cm)H X 24-15/32"(62.2cm)W X 8-1/2"(21.6cm)D
- **Input Power:** Clean and dry, compressed air @70-100 psi (5-7 bar) @ 8 cfm (226 L/min.) No electric input required.
- **Comes Complete with** 5ft. (1.5 m) hose, nozzle, dust bag, mounting brackets for XP-3TRAC and hose mounting bracket... ready for installation!

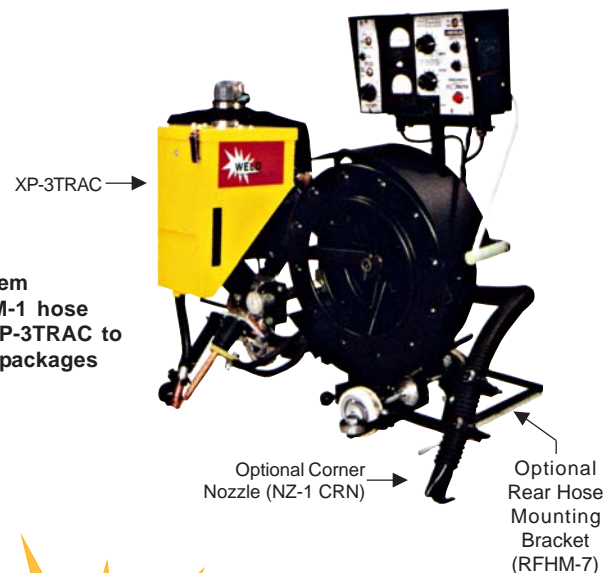

WELD
ENGINEERING CO., INC.

**FOR ORDERING INFORMATION
PLEASE CONTACT:**
34 Fruit St.
Shrewsbury, MA 01545 (U.S.A.)
Telephone: (508) 842-2224
Fax: (508) 842-3893
Web Site: weldengineering.com
Email: sales@weldengineering.com