




"MANUFACTURERS OF THE MOST COMPLETE LINE OF FLUX HANDLING EQUIPMENT IN THE WORLD"

34 FRUIT STREET
SHREWSBURY, MA 01545 (U.S.A.)
TELEPHONE: (508) 842-2224
FAX: (508) 842-3893
WEBSITE:
WWW.WELDENGINEERING.COM
EMAIL:
SALES@WELDENGINEERING.COM

FIGURE MMX-10

FIG. MMX-10

GRAVITY FEED SYSTEM FOR CONTINUOUS FLUX FEED. MM-1500X/P, MM-3000X/P, MM-5000X/P VACUUM WITH FH-100 OR HEATED HFH-100 HOPPER/SEPARATOR. (TYPICAL COMPONENT CONFIGURATION)

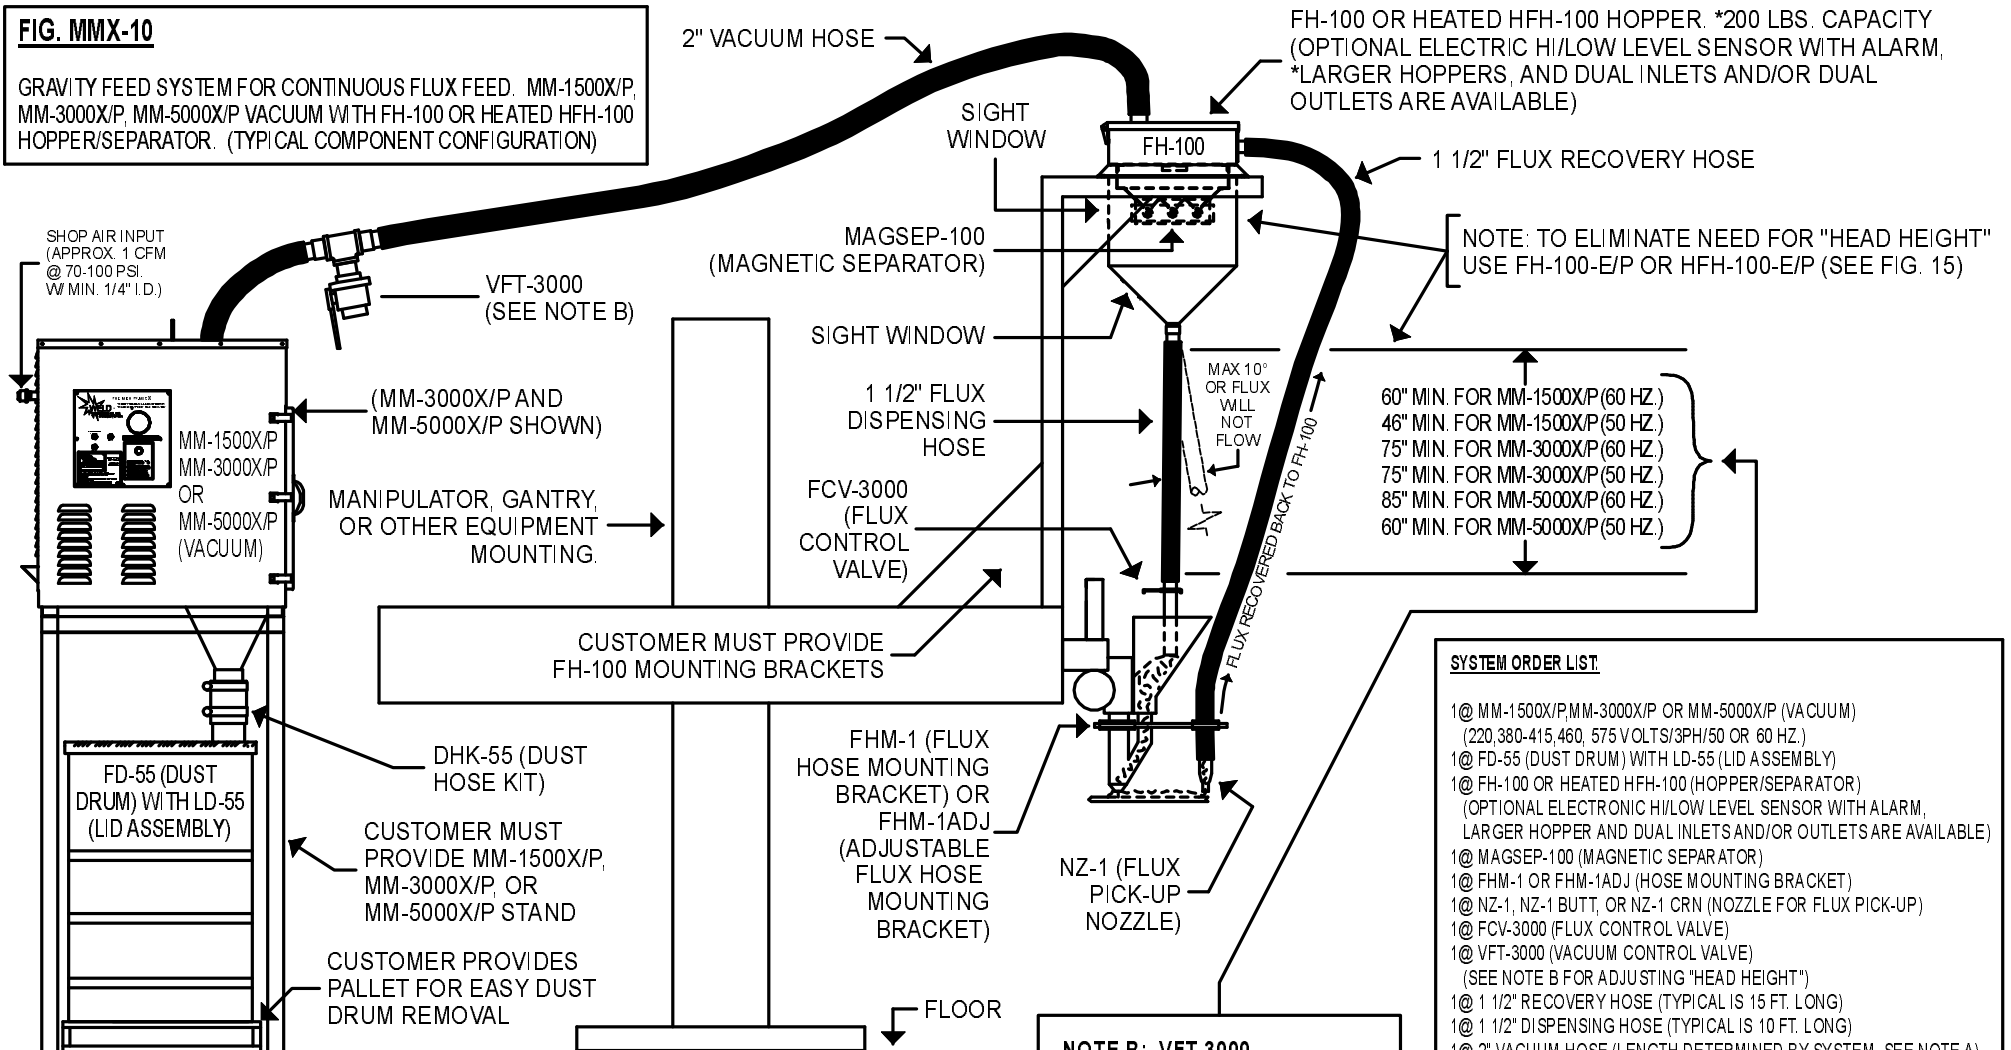

SYSTEM ORDER LIST

- 1 @ MM-1500X/P, MM-3000X/P OR MM-5000X/P (VACUUM) (220, 380-415, 460, 575 VOLT/3PH/50 OR 60 HZ.)
- 1 @ FD-55 (DUST DRUM) WITH LD-55 (LID ASSEMBLY)
- 1 @ FH-100 OR HEATED HFH-100 (HOPPER/SEPARATOR) (OPTIONAL ELECTRONIC HI/LOW LEVEL SENSOR WITH ALARM, LARGER HOPPER AND DUAL INLETS AND/OR OUTLETS ARE AVAILABLE)
- 1 @ MAGSEP-100 (MAGNETIC SEPARATOR)
- 1 @ FHM-1 OR FHM-1ADJ (HOSE MOUNTING BRACKET)
- 1 @ NZ-1, NZ-1 BUTT, OR NZ-1 CRN (NOZZLE FOR FLUX PICK-UP)
- 1 @ FCV-3000 (FLUX CONTROL VALVE)
- 1 @ VFT-3000 (VACUUM CONTROL VALVE) (SEE NOTE B FOR ADJUSTING "HEAD HEIGHT")
- 1 @ 1 1/2" RECOVERY HOSE (TYPICAL IS 15 FT. LONG)
- 1 @ 1 1/2" DISPENSING HOSE (TYPICAL IS 10 FT. LONG)
- 1 @ 2" VACUUM HOSE (LENGTH DETERMINED BY SYSTEM. SEE NOTE A)

NOTE B: VFT-3000

VFT-3000 ALLOWS VACUUM ADJUSTMENT. IF VACUUM IS REDUCED, ABOVE HEIGHT REQUIREMENTS FOR FH-100 MAY ALSO BE REDUCED.

NOTE A: MIGHTY-MACX VACUUM SELECTION

MM-1500X/P FOR SINGLE AND TWIN WIRE, WITH 2" VACUUM HOSE UP TO 35 FT.
MM-3000X/P FOR SINGLE, TWIN AND TANDEM WIRE, WITH 2" VACUUM HOSE UP TO 50 FT.
MM-5000X/P FOR SINGLE, TWIN AND TANDEM WIRE, WITH 2" VACUUM HOSE UP TO 100 FT.

BULLETIN: (PAGE 10) TB-MM708
FILE: 10-MMX~ FH-100 MM-X-P TB-DRT 7-11-2008.CAD
REVISED: M1500PFH.CAD (7-16-1996 TB-MM294)
WELD ENGINEERING CO., INC.
DRT 5-12-2009