




"MANUFACTURERS OF THE MOST COMPLETE LINE OF FLUX HANDLING EQUIPMENT IN THE WORLD"

34 FRUIT STREET  
SHREWSBURY, MA 01545 (U.S.A.)  
TELEPHONE: (508) 842-2224  
FAX: (508) 842-3893  
WEBSITE:  
WWW.WELDENGINEERING.COM  
EMAIL:  
SALES@WELDENGINEERING.COM

**FIGURE PT-19**

**FIG. PT-19**

PRESSURE FEED FLUX RECOVERY SYSTEM FOR CONTINUOUS FLUX FEED. (NOTE: NOT DEPENDENT UPON "HEAD HEIGHT" LIKE STANDARD FH-100.) MM-1500X, MM-3000X, MM-5000X VACUUM WITH FH-100-E/P OR HEATED HFH-100-E/P HOPPER/SEPARATOR, PT-100 FEED TANK, AND FF-3 FEED PIPE. (TYPICAL COMPONENT CONFIGURATION)

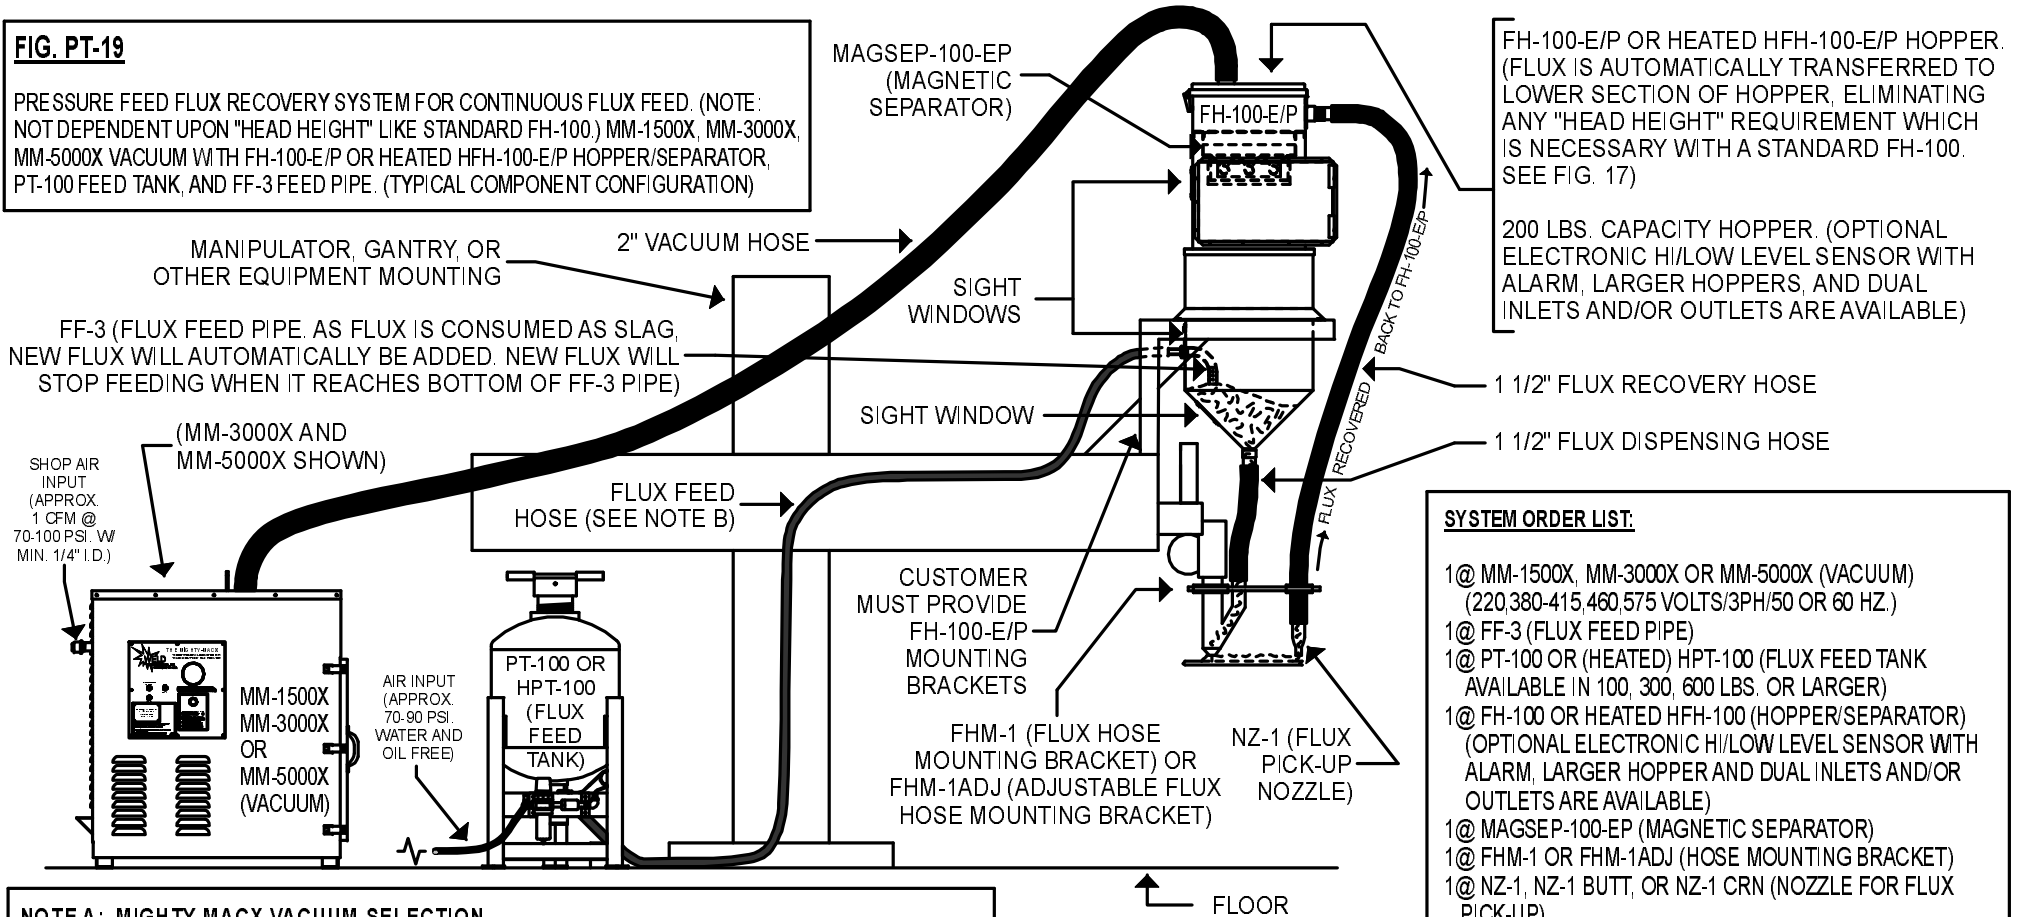

FH-100-E/P OR HEATED HFH-100-E/P HOPPER. (FLUX IS AUTOMATICALLY TRANSFERRED TO LOWER SECTION OF HOPPER, ELIMINATING ANY "HEAD HEIGHT" REQUIREMENT WHICH IS NECESSARY WITH A STANDARD FH-100. SEE FIG. 17)

200 LBS. CAPACITY HOPPER. (OPTIONAL ELECTRONIC HI/LOW LEVEL SENSOR WITH ALARM, LARGER HOPPERS, AND DUAL INLETS AND/OR OUTLETS ARE AVAILABLE)

**SYSTEM ORDER LIST:**

- 1@ MM-1500X, MM-3000X OR MM-5000X (VACUUM)  
(220,380-415,460,575 VOLTS/3PH/50 OR 60 HZ.)
- 1@ FF-3 (FLUX FEED PIPE)
- 1@ PT-100 OR (HEATED) HPT-100 (FLUX FEED TANK AVAILABLE IN 100, 300, 600 LBS. OR LARGER)
- 1@ FH-100 OR HEATED HFH-100 (HOPPER/SEPARATOR) (OPTIONAL ELECTRONIC HI/LOW LEVEL SENSOR WITH ALARM, LARGER HOPPER AND DUAL INLETS AND/OR OUTLETS ARE AVAILABLE)
- 1@ MAGSEP-100-EP (MAGNETIC SEPARATOR)
- 1@ FHM-1 OR FHM-1ADJ (HOSE MOUNTING BRACKET)
- 1@ NZ-1, NZ-1 BUTT, OR NZ-1 CRN (NOZZLE FOR FLUX PICK-UP)
- 1@ FLUX FEED HOSE (SEE NOTE B)  
(3/4" I.D. RECOMMENDED. 1/2", 3/4", 1" AVAILABLE)
- 1@ 1 1/2" RECOVERY HOSE (TYPICAL IS 15 FT. LONG)
- 1@ 1 1/2" DISPENSING HOSE (TYPICAL IS 5 FT. LONG)
- 1@ 2" VACUUM HOSE (LENGTH DETERMINED BY SYSTEM. SEE NOTE A)

**NOTE A: MIGHTY-MACX VACUUM SELECTION**

MM-1500X FOR SINGLE AND TWIN WIRE, WITH 2" VACUUM HOSE UP TO 35 FT.  
MM-3000X FOR SINGLE, TWIN AND TANDEM WIRE, WITH 2" VACUUM HOSE UP TO 50 FT.  
MM-5000X FOR SINGLE, TWIN AND TANDEM WIRE, WITH 2" VACUUM HOSE UP TO 100 FT.

**NOTE B: FEED HOSE INSIDE DIAMETER CHANGES MAXIMUM FLUX FEED RATE AND FLUX FEED NOZZLE SIZE**

INSIDE DIAMETER	MAX FLUX FEED RATE	FLUX FEED NOZZLE
1/2"	1 1/2 LBS. (.68 KG.)/MIN.	USE T-NOZ-1/2"
3/4"	4 TO 6 LBS. (1.81-2.72 KG.)/MIN.	USE T-NOZ-3/4"
1"	6 TO 8 LBS. (2.72-3.63 KG.)/MIN.	USE T-NOZ-1"

BASED ON AGGLOMERATED FLUX AND MAXIMUM HOSE LENGTH OF 50 FT. (CONSULT FACTORY FOR DETAILS)

BULLETIN: (PAGE 19) TB-MM708  
FILE: 19-PT~FH-100-EP PT TB-DRT 8-1-2008.CAD  
WELD ENGINEERING CO., INC  
DRT 9-8-2008